


SAFETY FENCES FOR SWIMMING POOLS



SWIM PARK

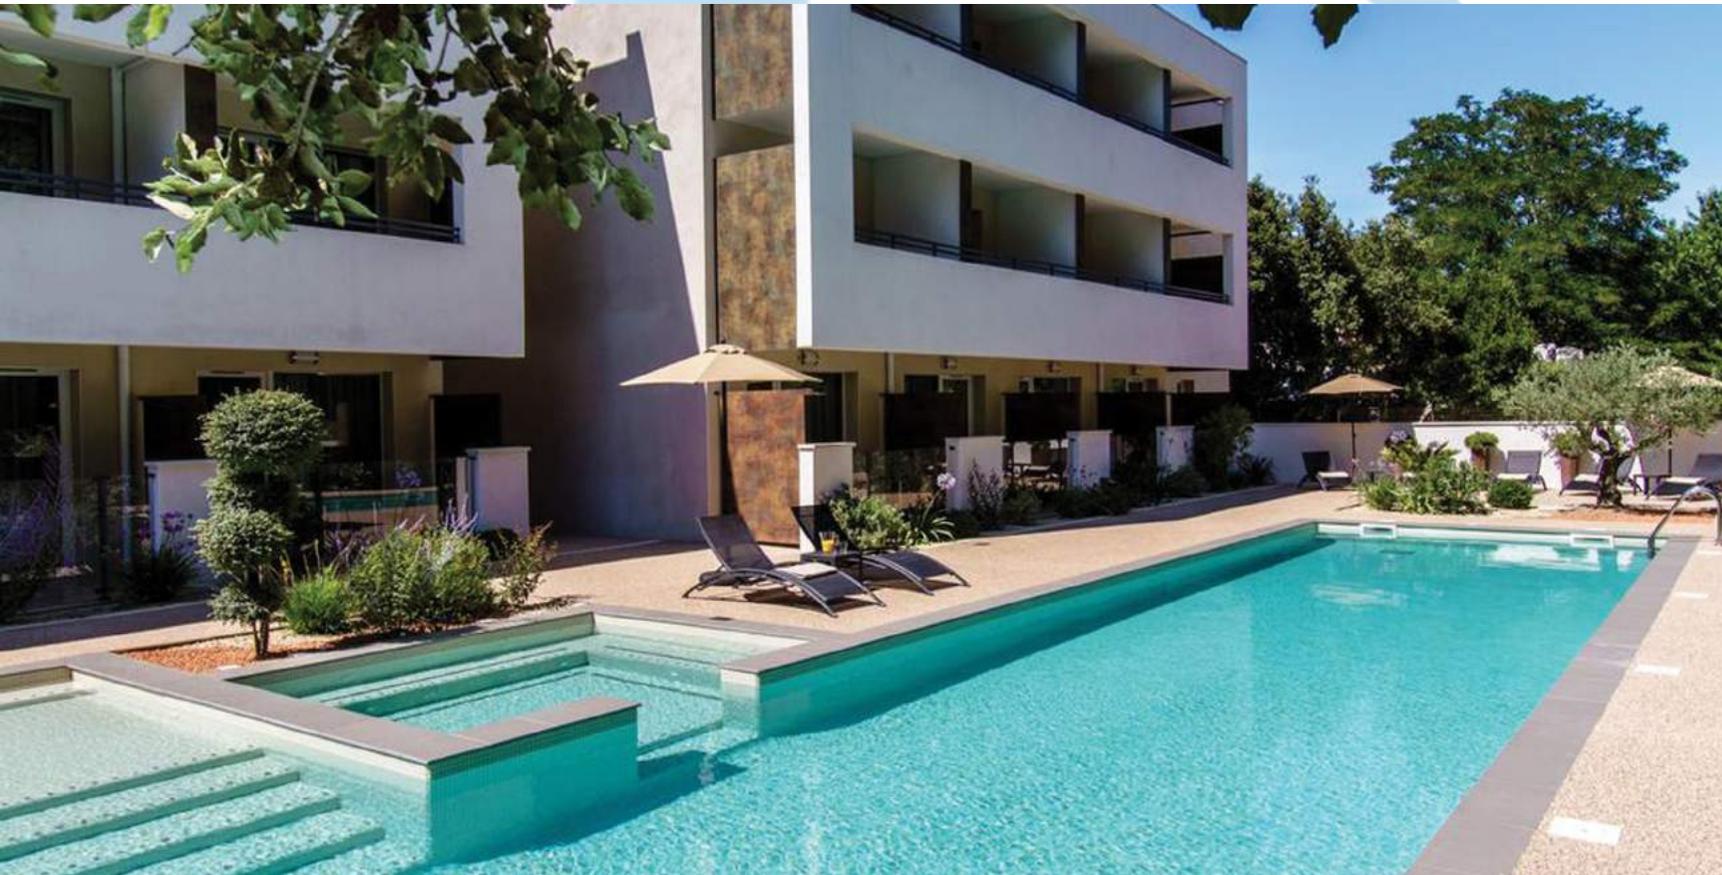

High-end product

- Designed and fabricated in France -

Minimal maintenance

- Aluminium thermo-coated -

Design et finishes

- Stilish with a clean modern look -

Customization

- Waves and colors -

NFP 90-306

Standard Compliant

- Private and collective application -

Aluminium structure and glass



Every project is unique, with a different shape, type of installation, exposure, characteristics of the site, all of which we study meticulously.

Our business is to analyze in detail all the technical parameters and to bring you the very best solutions.

All our products are designed and made in France, to bring you high-end products and quality service.



CONTENTS

MODEL SwimPark SPO1

NFP 90-306
Standard Compliant
- Private and collective application -

Presentation and finishes

Technical specifications

Installation advice

Guarantee: 2 years, parts and shipping



MODEL SwimPark SPO3

NFP 90-306
Standard Compliant
- Private and collective application -

Presentation and finishes

Technical specifications

Installation advice

Guarantee: 2 years, parts and shipping



Accessories, options, spare parts

This fence is intended to prevent children under 5 reaching the pool. A fence is however no substitute for close adult supervision. We recommended installing the fence at least 1 meter from the pool edge. For private swimming pools, avoid placing the fence too far from the pool as this can counteract its effectiveness

Domaine du Chateau de Nolet - Aucamville (France)
Realized by DB PISCINES, L'Union (31)



SwimPARK SP01

Easy to install
Adapts to all shapes
Choice of 3 lengths (1m, 1m50, 2m)
->can be cut to any lengths between 1 and 2 meters
Can be pre-made to custom lengths in glass version
Panels with aluminium structure

NFP 90-306 Standard Compliant




Finishes

mat white laquer

Presentation

Attractive and robust
Designer lines : aluminium structure for a lightweight look, carefully sized to provide perfect safety around pools. The Swim Park SP01 swimming pool barrier comes with either a 6mm thick (1/4 inch) transparent infill (plastic* or laminated safety glass) or alternatively with slimline vertical bars.

The choice of materials, essentially aluminum and stainless steel, the research for a maximal efficiency, and an optimal conception, allowed the elaboration of a strong and reliable product, the quality of which was proved by more than 10 years of installation.

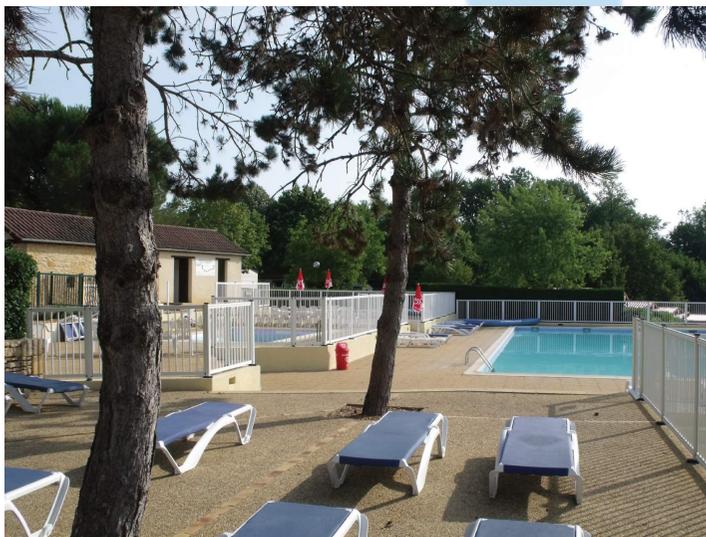

Aluminium vertical bars



Plastic infill* or laminated safety glass 6mm

*Contact with certain cosmetic or cleaning products can blemish these transparent panels. Such blemishes are visual only and in no way impair the inherent effectiveness of the barrier. The appearance of stains, colour changes, sheens, or other visual effects on the transparent panels is outside of our control and our liability.



Technical Specifications SPO1

This model is constituted by panels completely preassembled, available in several finishes (plastic, glass and aluminium bars). The panels are delivered without posts. It is necessary to allow for a post between every panel during the plan of setting-up plan.

2 posts are delivered preassembled with the gate.

Posts are slid into the posts and locked.


Posts can be cut in different length in plastic infill and bars panels. Can be pre-made to custom lengths in glass version.

Panels lengths = ENTRAXE of the posts

Gate length = ENTRAXE of the Gate posts

Fixation posts

References	CB108	CB109
Use	angle	Straight line
Section posts	70x70	70x44
Weight	3.3kg	2.7kg
Height	1.25m	
Section platine	160x90mm	
Entraxe fixation points	107mm	



Delivered with fixation part (without screw, see accessories page and «price list»)

Vertical bars panels

References	CB104	CB105	CB106
Lengths	2m	1.5m	1m
Height	1.22m		
Weight	10.4kg	8.8kg	5.6kg

Delivered without posts

Transparent panels 6mm




Ref. (plastique)	CB101	CB102	CB103
Ref. (glass)	CV101	CV102	CV103
Lengths	2m	1.5m	1m
Height	1.22m		
Weight	20.7kg	15.6kg	10.5kg

Delivered without posts

Transparent Gates R&L

Ref	CB107	CB117	CB173	CB174
Handle	Right	Left	Left	Right
Opening	Left	Right	Right	Left
Infill	Plastic		Glass	
Length	1m		1m	
Height	1.22m		1.22m	
Weight	25kg		28kg	

Delivered without posts

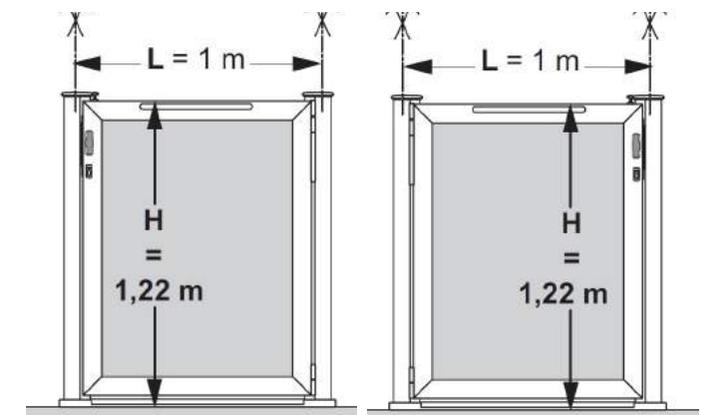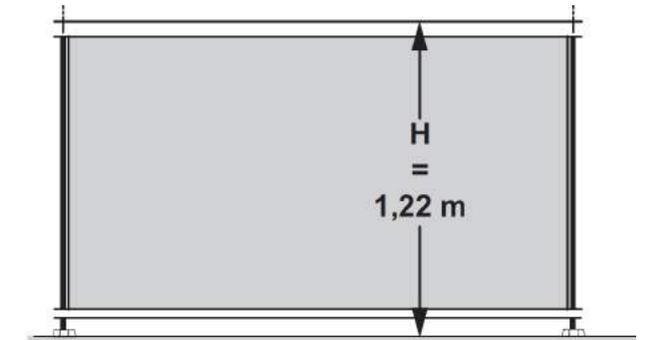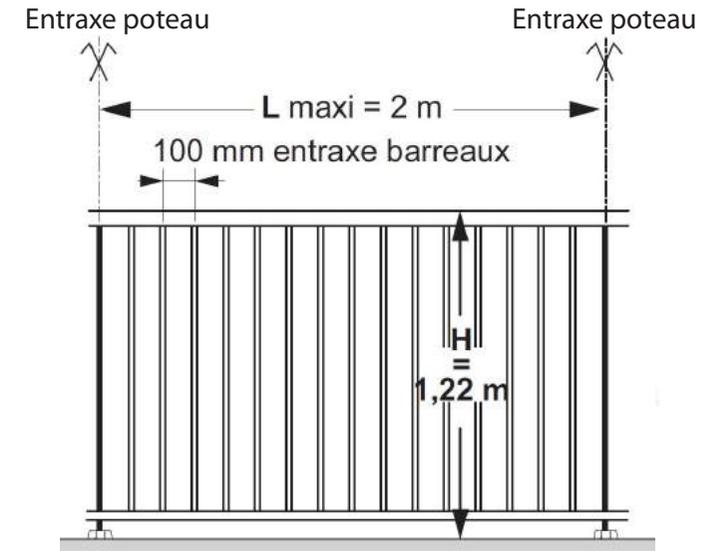

Gate with left handle

Right opening

Réf. CB117 et CB173

Gate with right handle


Left opening

Réf. CB107 et CB174



Installation advice

Details For the gate

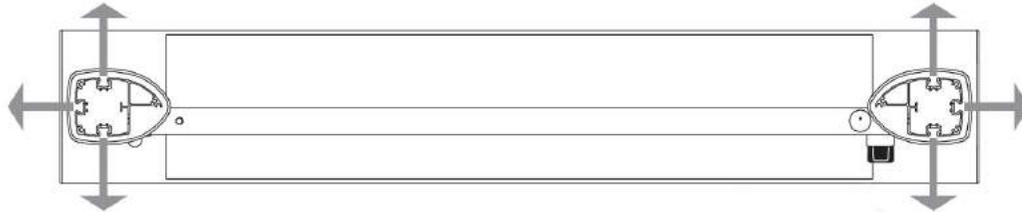

The gate authorizes 3 departures of panel. It is deeply advised to put panels in the alignment of the gate. Otherwise, it is necessary to plan a kit " big traffic " (to see ref. CB418 in the accessories section) to optimize its functioning.

Advised installation of the gate



Attention on the dimensions on the ground of the gate (width 19cm).

Against a wall, position the gate of 75 in 110mm of the wall.


Detail For straight line



Plan a post for straight line

Ref. CB109, 2 departures

Details For Fixation



Plan the dimensions of the deck when the post is situated near a wall.

The panels and the fixation of the posts must be installed perpendicularly.

Details For angle




Plan a post for angle

Ref. CB108, 4 departures

Details For various angles - Reference CB108 and CB109

Thanks to a system of articulation, the panel can form, with the axis of the post, an angle of 30° maximum.

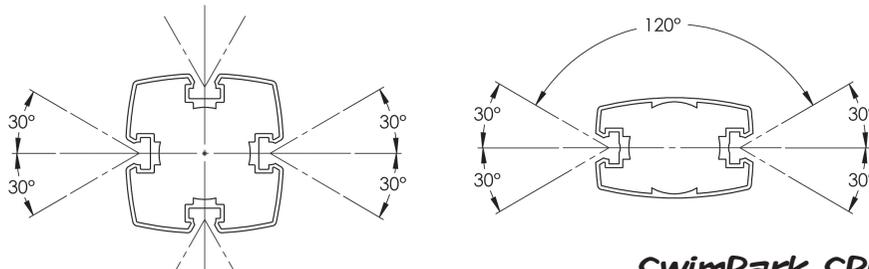

SwimPark SPO1 MODEL




Post for straight line - Ref. CB109

Camping La Bouquerie - DORDOGNE (France)
Realized by VERTE NATE, Saint-Geniès (24)




Installation advice

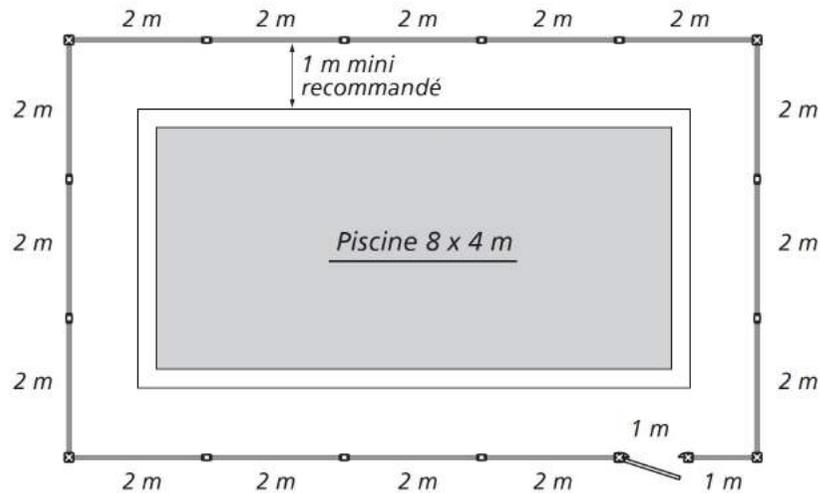

Example of installation for 8 x 4 m swimming pool

- 15 panels 2m ref. CB101, CB104 or CV101
- 1 panel 1m ref. CB103, CB106 or CV103
- 1 Gate 1m ref. CB107, CB117, CB173 or CB174
- 4 posts for angle ref. CB108
- 11 posts for straight lines ref. CB109

Other example with various angles:

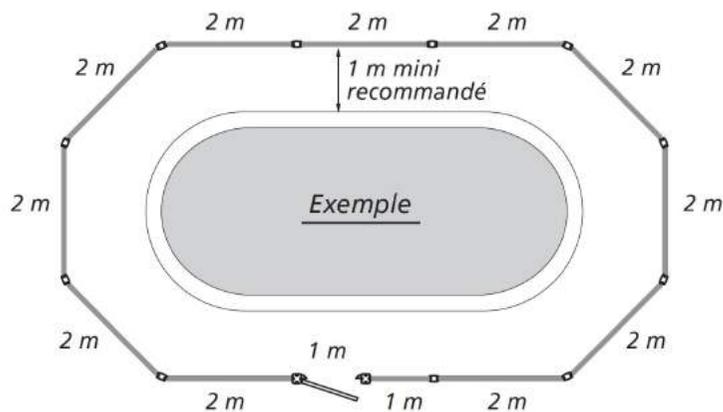


We recommended installing the fence at least 1 meter from the pool edge. For private swimming pools, avoid placing the fence too far from the pool as this can counteract its effectiveness

The modules designed in standard widths or custom widths (glass version) and the post slots enable connection at various angles, allowing both standard and creative shaped pools to be closed off.

When the safety barrier is used in conjunction with walls, the walls must be high enough (at least 1.10 meters high between anchor points) to prevent access by climbing and not allow access through gaps, doors, windows, etc. (doors and windows must be fitted with childproof locks).

Gate against a wall - Wall Fixation, accessorie ref. CB119

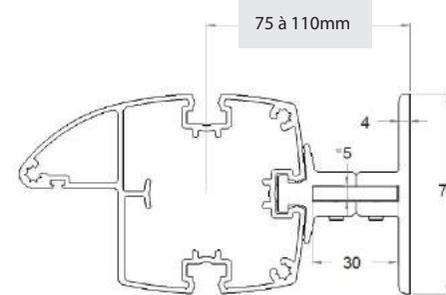


Against a wall, the gate must be fixed with a wall fixation (to see accessories section).

Plan a space between gate and wall:

75 to 110mm from the wall to the entrance of the gate's post.

Post against a wall

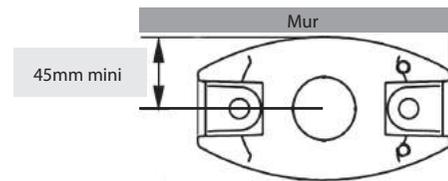

The first post from a wall has to be situated

In 45mm of the latter (quotation of the wall in the axis of the post)

With a wall fixation (to see accessories section),

Plan a space between gate and wall:

75 to 110mm from the wall to the entrance of the gate's post.

In every case, do not leave an overpass in 100 mm between the wall and the last element of the barrier.



SwimPARK SP03

Easy to install
Adapts to all shapes
Custom-length panels
Finishes: white aluminium structure
Custom finish

NFP 90-306 Standard compliant

Finishes



Glass tempered 8mm panel



Custom colours



Présentation

Discreet and elegant

Minimalist lines: simple upright posts directly accept the 8mm laminated or toughened glass infill. The Swim Park SP03 swimming pool barrier blends discreetly in with the surroundings and sets off the pool shape elegantly, without hiding anything.

Particulier - Latresne, 33 (France)
Realized in 2015



Technical Specifications SP03

This model is constituted by filling in tempered glass of thickness 8mm.
The panels are delivered without post. It is necessary to prevent a post between every panel during the plan of setting-up.

The design of posts and fixations of the glass, allows a precise orientation of the panels. All the panels are realized to measure according to the project.

2 posts are supplied preassembled with the gate, but it is necessary to prevent a kit of fixation for gate on each side (see ref. SP03-05 in the accessories section).


The lengths of the panels correspond to the entraxes of the fixation of the posts (2 meters maximum, only on request).

Glass inFill panels 8mm

Reference	SP03-01	SP03-02
Length	0.48 à 1m	1.01m à 1.5m
Height	1.14m	
Weight	10 à 22kg	22 à 32kg


Delivered with accessories for glass fixation

(without post)

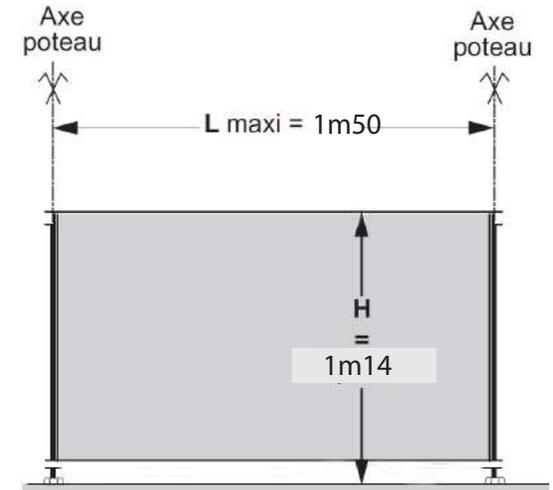

Fixation posts


Reference	SP03-04
Utilisation	Angles 45° à 315°
Section post	circle diameter 40
Weight	2.75kg
Height	1.15m
Section platine	160x90mm
Entraxe fixation posts	107mm

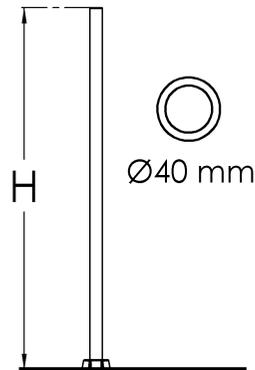

Delivered with fixation part
(without ankle, see accessories page and «price list»)

Gates D&G glass 6mm

Reference	CB173	CB174
Handle	Left	Righte
Opening	Right	Left
Finishes	Glass	Glass
Length	1m	1m
Height	1.22m	1.22m
Weight	28kg	28kg

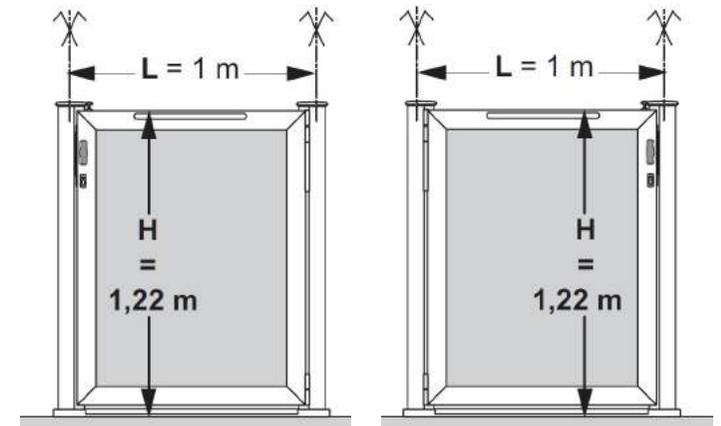

Gate with left handle

Right Opening

Réf. CB173

Gate with right handle

Left Opening

Réf. CB174

SwimPark SP03 MODEL

Forme Hotel - Mauguio, 34 (France)
Realized in 2015




Installation advice

The gate authorizes 3 departures of panel. It is deeply advised to put panels in the alignment of the gate. Otherwise, it is necessary to plan a kit "big traffic" (to see ref. CB418 in the accessories section) to optimize its functioning.

Details of the Gate

In every departure of panel, plan a kit of fixation for gate ref. SP03-05 in accessories section.

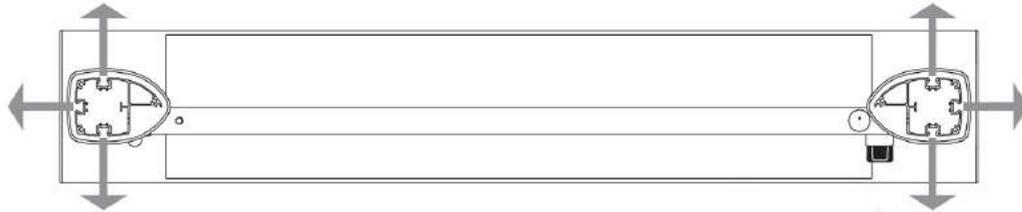

Advised installation of the gate




Attention on the dimensions on the ground of the gate (width 19cm).


Against a wall, position the gate of 75 in 110mm of the wall.

Details glass orientation

All the orientations are available with our post
Reference SP03-04.

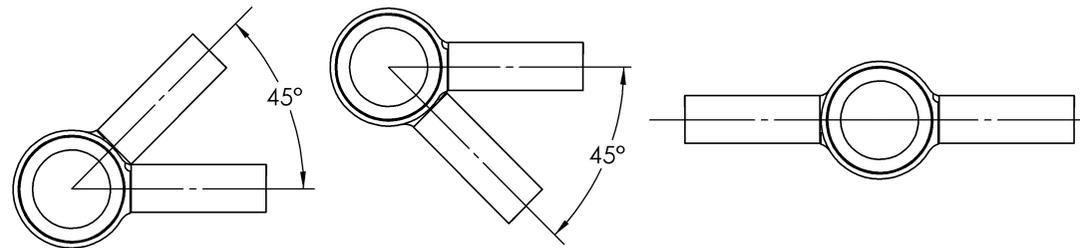


Details of the Fixation



Plan the dimensions of the deck when
the post is situated near a wall.

The panels and the fixation of the posts
must be installed perpendicularly.

Post against a wall

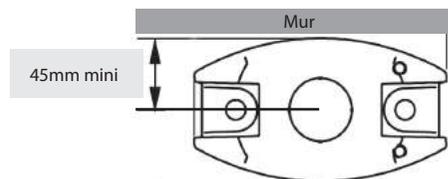

The first post from a wall has to be situated
In 45mm of the latter (quotation of the wall in the axis of the post).

**In every case, do not leave an overpass in 100 mm between
the wall and the last element of the barrier.**

SwimPark SPO3 MODEL

Particulier - Saint-Jean de Védas, 34 (France)
Realized by M. Menanteau en 2015



Installation advice


The modules designed in custom-length, and the specific posts with various angle allowing both standard and creatively shaped pools to be closed off.

When the safety barrier is used in conjunction with walls, the walls must be high enough (at least 1.10 meters high between anchor points) to prevent access by climbing and not allow access through gaps, doors, windows, etc. (doors and windows must be fitted with childproof locks).

The barrier must be at least 1 meter away from all water and a sufficient distance from pool fittings and accessories (filter units, ladders,..).


We recommended installing the fence at least 1 meter from the pool edge. For private swimming pools, avoid placing the fence too far from the pool as this can counteract its effectiveness

Gate against a wall - Wall Fixation, accessorie ref. CB119

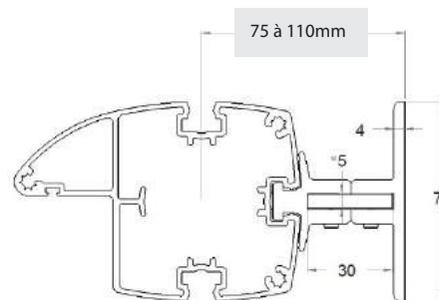

Against a wall, the gate must be fixed with a wall fixation (to see accessories section).

Plan a space between gate and wall:
75 to 110mm from the wall to the entrance of the gate's post.

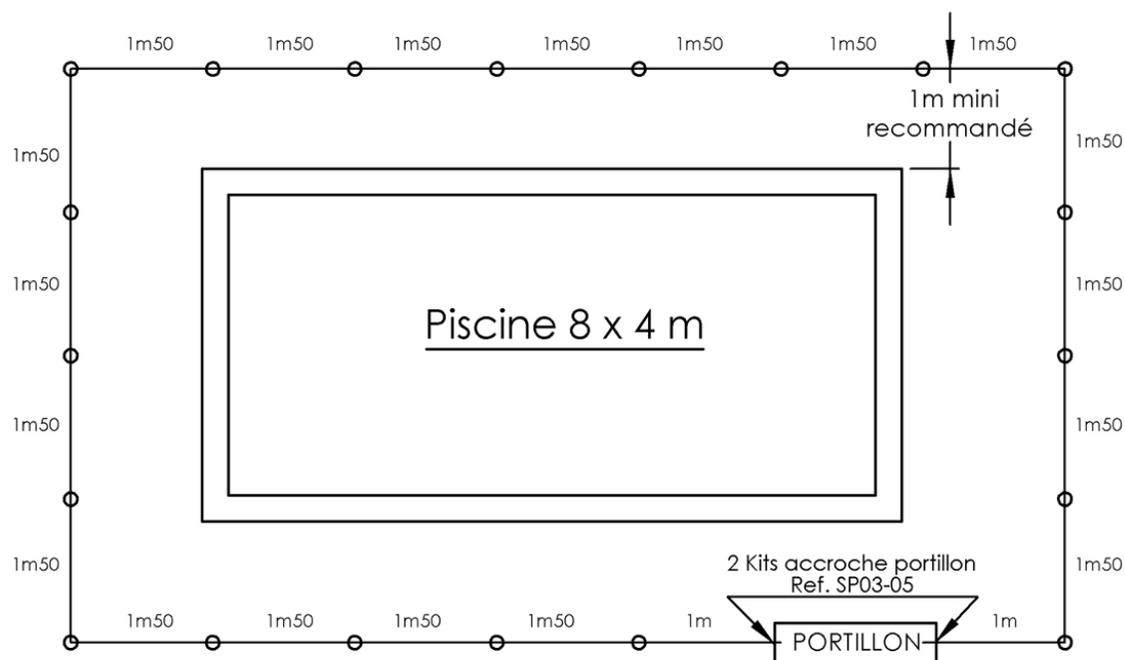


Example of installation for 8 x 4 m swimming pool:


- 19 panels 1m50, ref. SP03-02
- 2 panels 1m ref. SP03-01
- 1 Gate 1m ref. CB173 ou CB174
- 2 kits fixation for gate ref. SP03-05
- 20 posts ref. SP03-04



Accessories, options et spare parts




Wall fixation
Ref. CB119




Kit big trafic
Ref. CB418




Kit 2 anchors bolts
Ref. CB111




Post's Accessories SP01
Ref. CB400




Post's cap SP01
Ref. CB401




Post's cap SP01
Ref. CB402



Cap for doorstep
Ref. CB403




Gate's cap
Ref. CB404




Panels's cap SP01
Ref. CB405




Cluster gate
Ref. CB406



Handle kit
Ref. CB407



Post's Accessories SP03
Ref. CB408



Kit fixation Gate
Ref. SP03-05



10mm - sold per 4

Spacer for level gap
Ref. SP03-06



22mm

Final spacer
Ref. SP03-07

Accessories SP03:

SP03-05: allow the fixation of glass 8mm on a gate OR the installation of the SP03 model after a post of the SP01 model.

SP03-06: allow to compensate a level gap of the ground: 1cm per post maximum.

SP03-07: Necessity for the wedging of the last post Of the installation (against a wall).

Ground fixations SP01 ou SP03:

With 2 points of fixation per post or per gate
The type of the fixation depends to the nature of the ground (ref. CB111 for concrete slab).



Saint-Vivien de Médoc -2010



Hourtin - Camping les Ecureuils - 2013



Pays Basque - 2008



Amsterdam -2005



Côte d'azur -2008



Un lieu conservé secret... -2009



Côte d'azur - 2007



Côte d'azur - 2007



Pays Basque - 2008



Haute-Garonne - 2004



Dordogne - Camping la Bouquerie - 2010



Seine et Marne - Yellow Village - 2013

Installations of exception...

The art of the material



Manufacturing aluminium products for over 40 years.

Designer of systems built from aluminium profiles.

Production facilities formerly operated by TECHNAL, the leader in aluminium joinery.

Member of the French Standard Commission in 2001-2004, participating in the preparation of the swimming pool barrier standard NFP 90 -306, for children protection.

Over 10 years' experience in aluminium safety barriers.

SP01 Model: designed in 2001, presented for the first time in international event for swimming pool in Barcelona.

SP03 Model: designed in 2012, presented for the first time in international event for swimming pool in Lyon.

Perfect compromise between safety, elegance and discretion.



AXIUM Solutions aluminium - 21 rue Boudeville - 31100 TOULOUSE

SAS au capital de 80.000€ - RCS Toulouse: 753 488 774

Tél: +335 61 16 32 90 - Fax: +335 61 16 32 99 -